Naval Tecno Sud Boat Stand
ATTREZZATURE CANTIERI NAVALI CERTIFICATE CE
NAVAL TECNO SUD BOAT STAND S.R.L.
Via P. Pascali, 28 · 70010 Valenzano (BA)
P. IVA 08004980721 · Tel. +39 3935493586
navaltecnosud@gmail.com
www.navaltecnosud.it

| Naval Tecno sud | CV10 | Fixed tilt telescopic boat stand CRADLE | "SISTEME DE CARENAGE" |
|---|---|---|---|

**Puntello verticale** dotato di telescopio e vite di regolazione per Barche a motore, realizzato in varie altezze e in portata certificata **CE** di Ton. 10. Ideale per essere posizionato sui pattini di poppa di piccole, medie e grandi barche a motore, dotato di cappello con sfera che consente una oscillazione a 360°, si adatta alle varie inclinazioni di chiglia. Nelle misure più alte può essere usato per puntellare prua e poppa di barche a vela. **Personalizzabile a richiesta.**

**CV Vertical telescopic boat stand** with adjusting screw. Ideal for motorboats. It comes in various sizes and in **CE** approved working loads of 10 Ton. The spherical tilt head, allowing a 360° oscillation in order to best adjust any position of the tilt head, makes this kind of motorboat stand ideal to be placed under the centerline / bow of small, medium and large sized motorboats. Larger sized stands can also be used to support both the bow and the stern of sailing boats. **Customized on request.**

## CARATTERISTICHE - TECNICAL DATA - CARACTÉRISTIQUES

| | | | |
|---|---|---|---|
| **Portata assiale chiuso:** | **10 Ton.** | **Regolazione fine a vite:** | **150 mm** |
| Axial capacity closed: | | Fine adjustment screw: | |
| Capacité fermé: | | Reglage fin a vis: | |
| **Portata assiale esteso:** | **5 Ton.** | **Vite di regolazione:** | **M 36 mm** |
| Axial capacity extended: | | Adjusting screw: | |
| Capacité ouvrir: | | Vis de reglage: | |

## CAVALLETTO VERTICALE - VERTICAL CRADLE - SUPPORT METALIQUE VERTICAL

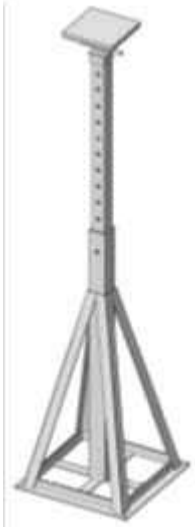

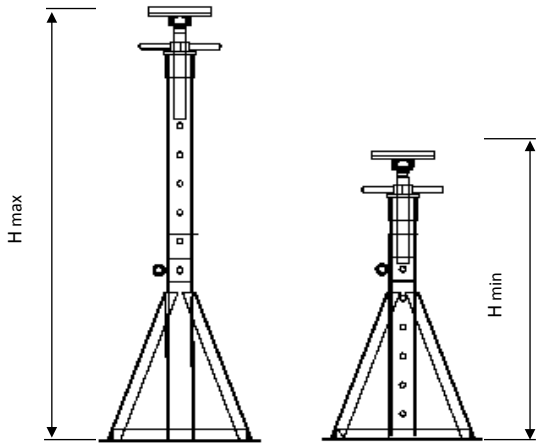


| COD. | H Min | H Max | Weight Poids |
|---|---|---|---|
| **CV10 - 10/15** | 1000 | 1500 | 36 |
| **CV10 - 12/18** | 1200 | 1800 | 42 |
| **CV10 - 14/22** | 1400 | 2200 | 52 |
| CV10 16/25 | 1600 | 2500 | 73 |
| **CV10 - 17/29** | 1700 | 2900 | 80 |
| **CV10 - 25/43** | 2500 | 4300 | 110 |
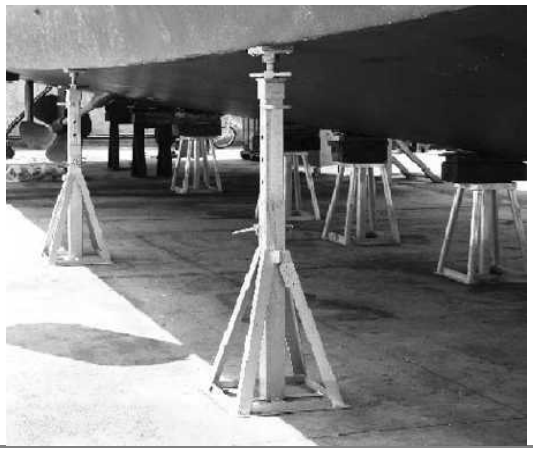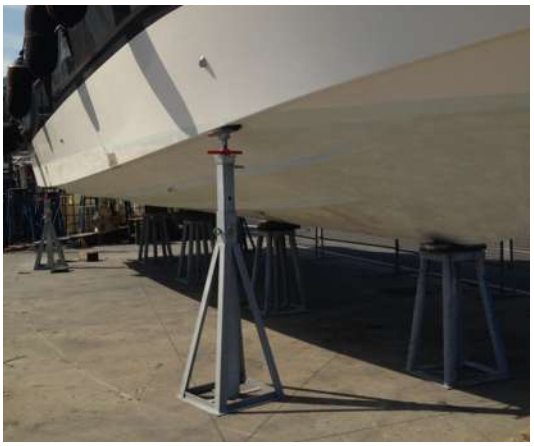
## FOTO - PHOTOS - PHOTOS